



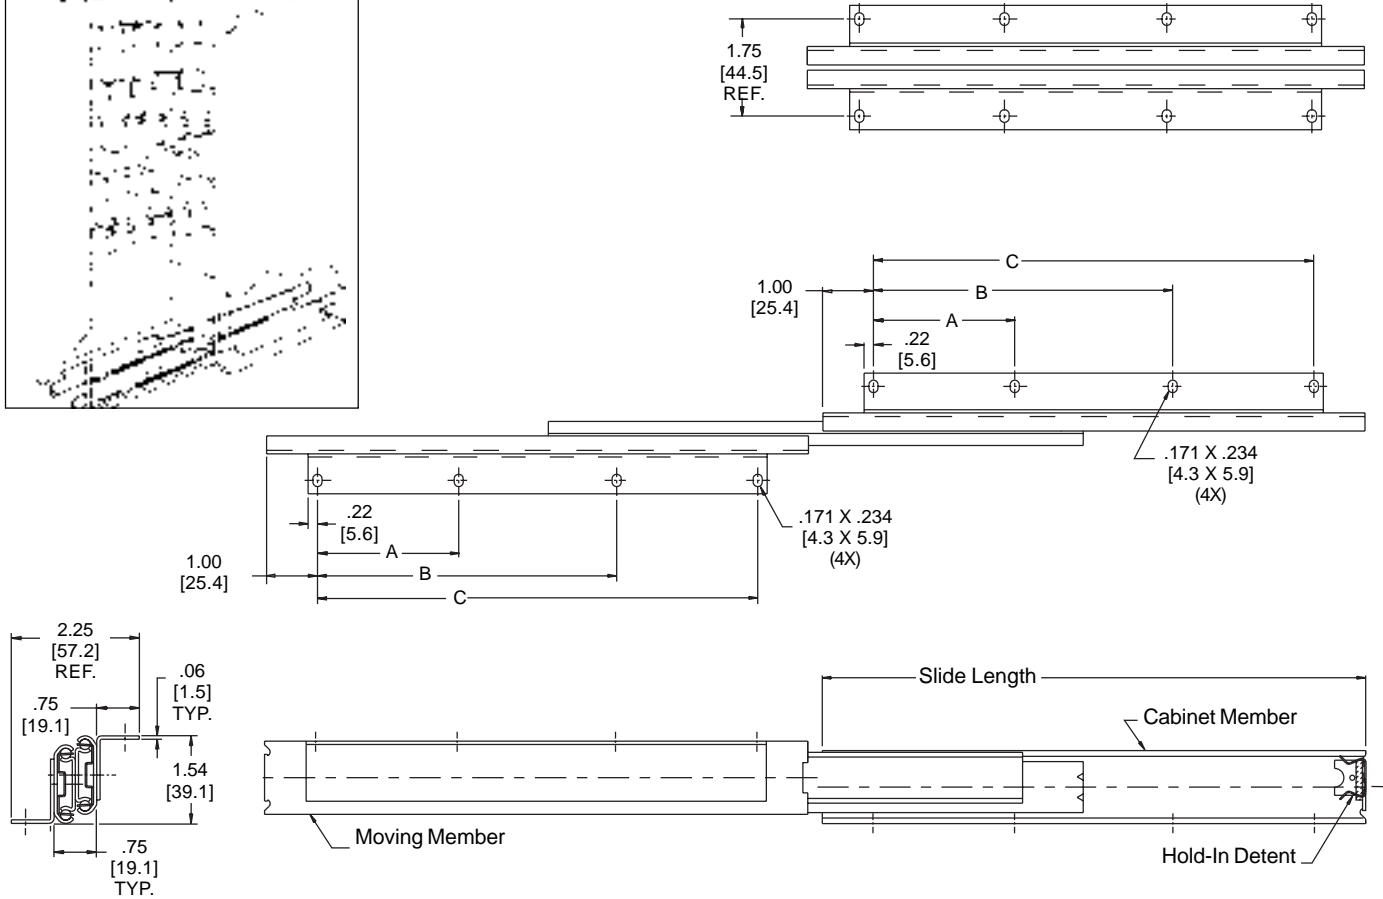

APPLICATIONS: Pull-out storage shelves, kitchen pull-out pantries, and entertainment centers.

MODEL 301-2590

Undermount Shelf Slide
Non-Disconnect
Over Travel
130 lb. [59 kg.] Capacity

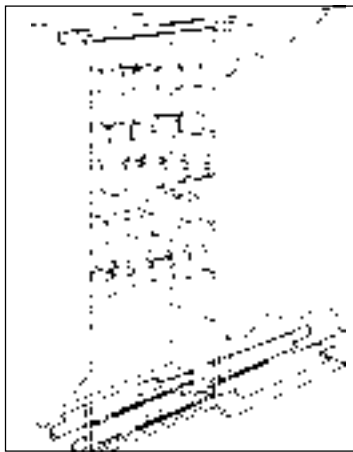

INCHES
[mm]

- Finish** Bright electro-zinc (C) or black zinc* (CB) plating
- Length** 12" to 28" [305mm to 711 mm]
- Height** 1.54" [39.1mm]
- Side Space** .75" [19.1mm] slide only
2.25" [57.2mm] with brackets
- Load** 130 lbs. [59 kg.] per pair**
- Travel** Slide length plus .83" [21.1mm]
- Mounting** Bracket/undermount
- Hardware** #8 pan head or round head screws
- Features** Hold-in detent, silenced open and closed, slide is handed

* Minimum order quantities may apply.
** Load rating based on an 18" slide on a 16" wide shelf cycled 50,000 times.

Part Number	Slide Length	Slide Travel	A	B	C
301-2590-12	12.00 [305]	12.83 [325.9]	4.00 [101.6]	6.00 [152.4]	10.00 [254.0]
301-2590-14	14.00 [356]	14.83 [376.7]	4.00 [101.6]	8.00 [203.2]	12.00 [304.8]
301-2590-16	16.00 [406]	16.83 [427.5]	4.00 [101.6]	10.00 [254.0]	14.00 [355.6]
301-2590-18	18.00 [457]	18.83 [478.3]	4.00 [101.6]	12.00 [304.8]	16.00 [406.4]
301-2590-20	20.00 [508]	20.83 [529.1]	7.00 [177.8]	11.00 [279.4]	18.00 [457.2]
301-2590-22	22.00 [559]	22.83 [579.9]	7.00 [177.8]	13.00 [330.2]	20.00 [508.0]
301-2590-24	24.00 [610]	24.83 [630.7]	7.00 [177.8]	15.00 [381.0]	22.00 [558.8]
301-2590-26	26.00 [660]	26.83 [681.5]	7.00 [177.8]	17.00 [431.8]	24.00 [609.6]
301-2590-28	28.00 [711]	28.83 [732.3]	7.00 [177.8]	19.00 [482.6]	26.00 [660.4]

Installation Instructions

1. Mark a line at least 1/4" [6.4mm] in from the right side of the cabinet opening and parallel to the cabinet side.
2. Locate a point on this line 1.00" [25.4mm] back from the desired front of the slide.
3. Using #8 pan or round head screws, mount the cabinet member bracket through the first hole at this point.

NOTE: For maximum strength, ensure that the hold-in detent spring is installed inside the cabinet.

4. Mount the left hand slide similarly, locating the screw centerline of the cabinet member bracket at least 1/4" [6.4mm] in from the left side of the opening.
5. Keeping the right and left hand slides parallel, install the remainder of the cabinet member screws.

NOTE: When using soft materials such as particle board, replace rear cabinet mounting screws with through bolts.

6. With slides extended, center the shelf and drive the screws up through the moving member brackets into the bottom of the shelf.

NOTE: If the unit is mounted too close to the floor, reverse the procedure above and install the moving member screws first.

Slide Ordering Instructions

Complete your slide order for Accuride model 301-2590 by specifying the following:

Total Required Slides _____ 20 Pair _____ C 301-2590 -16 D
Slide Finish _____
Slide Model Number _____
Slide Length _____
Optional Polybag Packaging _____

Packaging

Distributor (D) Pack: All lengths are packaged 5 pair per box. Polybag includes one pair of slides and mounting screws.

Bulk (P) Pack: Slides only. Left hand slides and right hand slides are packaged in separate boxes.

Lengths 12" - 18" 20 each per box
Lengths 20" - 28" 10 each per box

Specifications

Slide members and ball retainers: Cold rolled steel
Ball bearings: Carburized steel

Note: Specifications, materials, prices, terms, and delivery are subject to change without notice.

Accuride

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue
Santa Fe Springs, CA 90670

TEL (562) 903-0200

FAX (562) 903-0208

www.accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom