

CLIP 170 hinges



CLIP top/CLIP



Features

- 170° opening angle
- 3-dimensional adjustment
- All metal hinge, nickel plated
- Available INSERTA tool free attachment

Cover caps
Mounting plates
BLUMOTION for doors

page 27
pages 43-47
page 73


Minimum Reveal

Minimum reveal table						
0	0	0	0	0.2	2.2	3
0	0	0	0	0	1.4	4
0	0	0	0	0	0.9	5
0	0	0	0	0	0	6
0	0	0	0	0	0	7
0	0	0	0	0	0	8
16	18	19	20	22	24	B
T Door thickness						Bore

Cross reference the door thickness and bore distance to assure that doors won't bind when opened.


Frame cabinet applications

Overlay door




Panel cabinet applications


Overlay door



Partial overlay door




Twin overlay doors

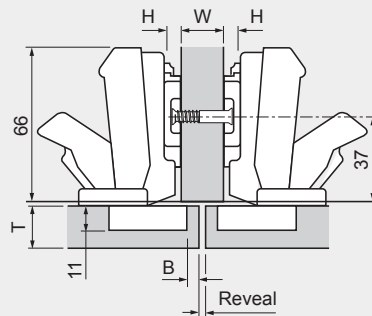

Inset door

Use half-cranked hinge



See back cover fold out for more specifications →

Straight arm hinges

	Self close
Screw on	71.6550
Press-in	71.6580
INSERTA	71.6540.01

Overlay table									
0	14	15	16	17	18	19	1.5	65	
3	11	12	13	14	15	16	4.5	68	
4.5	9.5	10.5	11.5	12.5	13.5	14.5	6	69.5	
6	8	9	10	11	12	13	7.5	71	
9	5	6	7	8	9	10	10.5	74	
H	3	4	5	6	7	8	P	S	
Plate	B Bore distance						Clearances		

11 fixed distance

NOTE: 4.5 plate only available for face frame, 9 plate only available for panel cabinets

Half-cranked hinges (9.5mm)

	Self close
Screw on	71.6650
Press-in	71.6680

Reveal table							Twin overlay		
0	7	5	3	1	-	-	16	11	75
	10	8	6	4	2	0	19		
H	3	4	5	6	7	8	W	P	S
Plate	B Bore distance						Panel	Clearances	

Overlay table							Partial overlay	
0	4.5	5.5	6.5	7.5	8.5	9.5	11	75
H	3	4	5	6	7	8	P	S
Plate	B Bore distance						Clearances	

1.5 fixed distance

Half-cranked hinges (9.5mm)

	Self close
Screw on	71.6650
Press-in	71.6680

Reveal table								
9	4.5	3.5	2.5	1.5	.5	-	20	84
H	3	4	5	6	7	8	P	S
Plate	B Bore distance						Clearances	

- 7.5 fixed distance